


KÖCO IT

DIN EN ISO 13918

Flanged stud with internal thread and ignition tip

- Part.no. applies to steel, grade 4.8, copper plated
 - Other types and dimensions upon request.
- Not a part from warehouse, minimum quantities are needed.

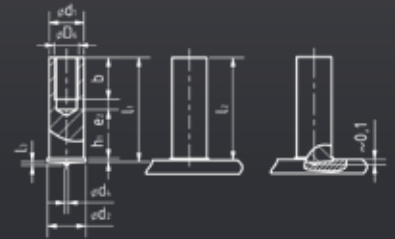

d_1	D_6	l_1	b	d_2	d_4	l_3	h_1	Part-no.	Mass kg/100	Ceramic ferrule
5	M3	10	5	6,5	0,75	0,8	0,7 - 1,4	102-0001-103	0,134	351-7051-000
		12						102-0002-103	0,164	
		16						102-0003-103	0,226	
		20						102-0004-103	0,288	
		25						102-0005-103	0,365	
6	M4	10	6	7,5	0,75	0,8	0,7 - 1,4	102-0030-103	0,181	351-7052-000
		12						102-0031-103	0,218	
		16						102-0032-103	0,307	
		20						102-0033-103	0,396	
		25						102-0034-103	0,507	
7,1	M5	10	6	9	0,75	0,85	0,8 - 1,4	102-0058-103	0,233	351-7053-000
		12						102-0060-103	0,270	
		16	7,5					102-0061-103	0,387	
		20						102-0062-103	0,513	
		25						102-0063-103	0,670	

$l_2 \approx l_1 - 0,3 \text{ mm}$.

